



Equipos, partes y accesorios de tecnología informática y servicios de soporte técnico

Cotización No. 001 - 273

NIT	CLIENTE	CONTACTO	FECHA	CIUDAD
			03/10/2016	
TELÉFONO	DIRECCIÓN	EMAIL	DESCUENTO	FORMA DE PAGO

Atendiendo a su amable solicitud, enviamos la cotización de los productos solicitados por su organización:

ITEM	CÓDIGO	DESCRIPCIÓN	CANTIDAD	VR. UNITARIO	VR. TOTAL
1		CAMARAS HD TVI HIKVISION HK-DS2CE56D1T-IR	1	S/. 279.66	S/. 279.66
2					
3					
4					
5					
6					
<b>Opciones de Pago:</b>				<b>SUBTOTAL</b>	S/. 279.66
				<b>IGV</b>	S/. 50.34
				<b>TOTAL A PAGAR</b>	S/. 330.00

**Codiciones y validez de la oferta:**

30 dias

**Validez:**

**Condiciones de entrega:**

Entrega Inmediata

**Condiciones de Garantía:**

garantia de 1 año

Esperamos haber dado alcance a sus requerimientos

Cordialmente,

RICARDO TALAVERA

RPM: #999033365 RPC:959354677

DIRECCIONES

- Direccion: -Lima: Av Nicolas Arriola 265 Of. 201 (referencia: a 1 cuadra de Cruz del Sur de Javier Prado )

- Calle Rivero 107 of 302. Cercado - Arequipa

También estamos en:

Trujillo Puno Cajamarca - Piura -Tumbes - Ica - Chiclayo - Ayacucho- Tacna - Cusco

CUENTAS BANCARIAS :

INTEGRASAT SOLUCIONES CENTER SRL , RUC : 20455256357

Cuenta Corriente BCP Soles

215-2050250-0-12

Código interbancario: CCI: 00221500205025001225

Cuenta Corriente BCP DOLARES

215-2295979-1-31

Código interbancario: CCI 00221500229597913124

# ESPECIFICACIONES TECNICAS

## HIKVISION

### DS-2CE56D1T-IR


### HD1080P Turbo HD Turret Camera



#### Key features

- HD1080P Video Output
- Adopt HDTVI Technology
- True Day/Night, Smart IR
- Up to 20m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

#### Dimensions

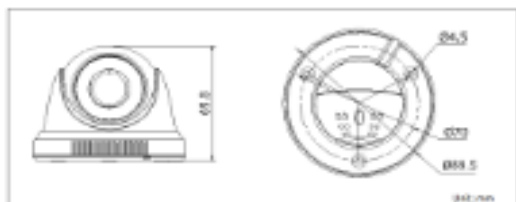

#### Available models

DS-2CE56D1T-IR

#### DS-2CE56D1T-IR

<b>Camera</b>	
Image Sensor	1 / 2.7" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	1/25(1/30) s to 1/50,000 s
Lens	3.6mm (5mm optional)
	Angle of View: 90°(3.6mm), 55.4°(5mm)
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
<b>Menu</b>	
Camera ID	On/off (0-255)
AGC	Support
D/N Mode	Color/ BW/ Auto/ EXT
White Balance	Auto/ User/ Push/ 8000K/ 6000K/ 4200K/ 3000K
Privacy Mask	On/ Off, maximum 2 zones
Motion Detection	On/ Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English/ Chinese
Function	Digital noise reduction, Mirror
<b>General</b>	
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	Up to 20m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimensions	φ 89.5 × 69.8 mm (φ 3.52" × 2.75")
Weight	180 g (0.40 lb)