



Equipos, partes y accesorios de tecnología informática y servicios de soporte técnico

Cotización No. 001 - 233

NIT	CLIENTE	CONTACTO	FECHA	CIUDAD
			01/10/2016	
TELÉFONO	DIRECCIÓN	EMAIL	DESCUENTO	FORMA DE PAGO

Atendiendo a su amable solicitud, enviamos la cotización de los productos solicitados por su organización:

ITEM	CÓDIGO	DESCRIPCIÓN	CANTIDAD	VR. UNITARIO	VR. TOTAL
1		DVR HK-DS7116HGHI-F1	1	S/. 745.76	S/. 745.76
2					
3					
4					
5					
6					
Opciones de Pago:				<b>SUBTOTAL</b>	S/. 745.76
				<b>IGV</b>	S/. 134.24
				<b>TOTAL A PAGAR</b>	S/. 880.00

**Codiciones y validez de la oferta:**

30 dias

Validez:

**Condiciones de entrega:**

Entrega Inmediata

**Condiciones de Garantía:**

garantia de 1 año

Esperamos haber dado alcance a sus requerimientos

Cordialmente,

RICARDO TALAVERA

RPM: #999033365 RPC:959354677

DIRECCIONES

- Direccion: -Lima: Av Nicolas Arriola 265 Of. 201 (referencia: a 1 cuadra de Cruz del Sur de Javier Prado )

- Calle Rivero 107 of 302. Cercado - Arequipa

También estamos en:

Trujillo Puno Cajamarca - Piura -Tumbes - Ica - Chiclayo - Ayacucho- Tacna - Cusco

CUENTAS BANCARIAS :

INTEGRASAT SOLUCIONES CENTER SRL , RUC : 20455256357

Cuenta Corriente BCP Soles

215-2050250-0-12

Código interbancario: CCI: 00221500205025001225

Cuenta Corriente BCP DOLARES

215-2295979-1-31

Código interbancario: CCI 00221500229597913124

# ESPECIFICACIONES TECNICAS

DELTOC

**HIKVISION**

## DS-7100HGH-F1 SERIES TURBO HD DVR



### Features and Functions

#### Video Input and Transmission

- Connectable to HDTVI, AHD and analog cameras
- Long distance transmission over UTP and coaxial cable

#### Compression and Recording

- One-key enable H.264+ compression to improve encoding efficiency by up to 50% and reduce data storage costs
- Full channel recording at up to 720p resolution

#### Video Output

- HDMI/VGA output at up to 1920 × 1080 resolution

#### Storage and Playback

- One SATA interface (up to 6 TB capacity per HDD)
- 4/8/16-ch synchronous playback at up to 720p resolution
- Smart search for efficient playback

#### Smart Function

- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the *admin*
- Clear-text password available

#### Network & Ethernet Access

- Hik Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- One self-adaptive 10/100Mbps network interface
- Output bandwidth limit configurable

# ESPECIFICACIONES TECNICAS

DELTOC

**HIKVISION**

## Specifications


Model	DS-7104HGHI-F1	DS-7108HGHI-F1	DS-7116HGHI-F1	
Video/Audio input	Video compression	H.264+/H.264		
	Analog video input	4-ch	8-ch	16-ch
	HDTVI input	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
	AHD input	720p25, 720p30		
	CVBS input	Support		
	Audio compression	G.711u		
	Audio input/Two-way audio input	1-ch ,RCA (2.0 Vp-p, 1 KΩ)		
Video/Audio output	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Encoding resolution	720p/WD1/4CIF/VGA/CIF		
	Frame rate	Main stream: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)		
		Sub-stream: CIF/QVGA/QCIF@ 25fps (P)/30fps (N); 2CIF@6fps	Sub-stream: CIF/QVGA/QCIF@25fps (P)/30fps (N); 4CIF/2CIF@6fps	
	Video bit rate	32 Kbps to 4 Mbps		
	Audio output	1-ch, RCA (Linear, 1 KΩ)		
	Audio bit rate	64 Kbps		
	Dual stream	Support		
	Stream type	Video, Video & Audio		
	Synchronous playback	4-ch	8-ch	16-ch
Network management	Remote connections	32	128	
	Network protocols	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	1 SATA interface		
	Capacity	Up to 6 TB capacity for each disk		
External interface	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface		
	USB interface	Rear panel: 2 × USB 2.0		
General	Power supply	12 VDC		
	Consumption (without HDD)	≤ 8 W	≤ 12 W	≤ 20 W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)		
	Working humidity	10% to 90%		
	Dimensions (W × D × H)	200 × 200 × 45 mm (7.9 × 7.9 × 1.8 inch)		285 × 210 × 45 mm (11.2 × 8.3 × 1.8 inch)
	Weight (without HDD)	≤ 0.8 kg (1.8 lb)		≤ 1.2 kg (2.6 lb)

# ESPECIFICACIONES TECNICAS

DELTOC

HIKVISION

## Physical Interfaces

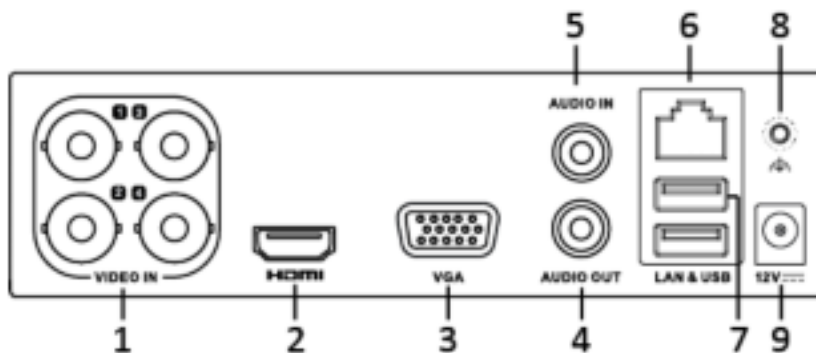

The rear panel of DS-7108/7116HGHI-F1 provides 8/16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	LAN Network Interface
2	HDMI Interface	7	USB Interfaces
3	VGA Interface	8	GND
4	AUDIO OUT, RCA Connector	9	12 VDC Power Input
5	AUDIO IN, RCA Connector		

## Available Models

DS-7104HGHI-F1, DS-7108HGHI-F1, DS-7116HGHI-F1