



Equipos, partes y accesorios de tecnología informática y servicios de soporte técnico

Cotización No. 001 - 223

NIT	CLIENTE	CONTACTO	FECHA	CIUDAD
			01/10/2016	
TELÉFONO	DIRECCIÓN	EMAIL	DESCUENTO	FORMA DE PAGO

Atendiendo a su amable solicitud, enviamos la cotización de los productos solicitados por su organización:

ITEM	CÓDIGO	DESCRIPCIÓN	CANTIDAD	VR. UNITARIO	VR. TOTAL
1		NVR 16 CANALES HK-DS7616NI-E2	1	S/. 661.02	S/. 661.02
2					
3					
4					
5					
6					
Opciones de Pago:				SUBTOTAL	S/. 661.02
				IGV	S/. 118.98
				TOTAL A PAGAR	S/. 780.00

Codiciones y validez de la oferta:

30 dias

Validez:

Condiciones de entrega:

Entrega Inmediata

Condiciones de Garantía:

garantia de 1 año

Esperamos haber dado alcance a sus requerimientos

Cordialmente,

RICARDO TALAVERA

RPM: #999033365 RPC:959354677

DIRECCIONES

- Direccion: -Lima: Av Nicolas Arriola 265 Of. 201 (referencia: a 1 cuadra de Cruz del Sur de Javier Prado)

- Calle Rivero 107 of 302. Cercado - Arequipa

También estamos en:

Trujillo Puno Cajamarca - Piura -Tumbes - Ica - Chiclayo - Ayacucho- Tacna - Cusco

CUENTAS BANCARIAS :

INTEGRASAT SOLUCIONES CENTER SRL , RUC : 20455256357

Cuenta Corriente BCP Soles

215-2050250-0-12

Código interbancario: CCI: 00221500205025001225

Cuenta Corriente BCP DOLARES

215-2295979-1-31

Código interbancario: CCI 00221500229597913124

ESPECIFICACIONES TECNICAS




DS-7604/08/16NI-E1(-E2)/A Embedded NVR



Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4/8/16-ch network cameras can be connected with 25M/50M/100M incoming bandwidth
- Up to 2 SATA interfaces
- Support network detection, including network delay, packet loss, etc.

Rear Panel

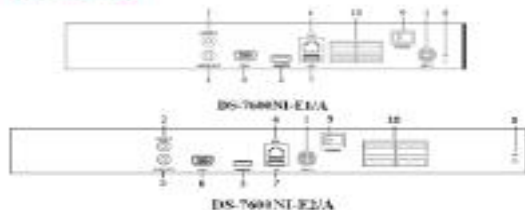

1. Power Supply
2. Audio In
3. HDMI interface
4. LAN Network Interface
5. Audio Out
6. VGA interface
7. USB interface
8. Ground
9. Power Switch
10. Alarm I/O

Available models

- DS-7604NI-E1/A
- DS-7608NI-E1/A
- DS-7616NI-E1/A

	DS-7604NI-E1/A	DS-7608NI-E1/A	DS-7616NI-E1/A	DS-7608NI-E2/A	DS-7616NI-E2/A
Video/Audio input					
IP video input	4-ch	8-ch	16-ch	8-ch	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1KΩ)				
Network					
Incoming bandwidth	25Mbps	50Mbps	100Mbps	50Mbps	100Mbps
Outgoing bandwidth	80Mbps				
Remote connection	128				
Video/Audio output					
Recording resolution	5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/OCIF				
Frame rate	Main stream: 50 fps (P) / 60 fps (N) Sub-stream: 50 fps (P) / 60 fps (N)				
HDMI/VGA output	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz				
Audio output	1-ch, RCA (Linear, 1KΩ)				
Decoding					
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/OCIF				
Capability	4-ch@1080P	8-ch@720P, 8-ch@1080P	16-ch@4CIF, 12-ch@720P, 8-ch@1080P	8-ch@720P, 8-ch@1080P	16-ch@4CIF, 12-ch@720P, 8-ch@1080P
Hard disk					
SATA	1 SATA interface for 1 HDD		2 SATA interface for 2 HDDs		
Capacity	Up to 4TB for each disk				
External interface					
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface				
USB interface	1 × USB 2.0 and 1 × USB 3.0				
Alarm in/out	4 / 1				
Others					
Power supply	12V DC				
Consumption(without hard disk)	≤ 10W				
Working temperature	-10 °C ~ +55 °C (+14 °F ~ +131 °F)				
Working humidity	10 % ~ 90 %				
Chassis	1U chassis			3BU chassis	
Dimensions(W × D × H)	315 × 230 × 45 mm (12.4 × 9.0 × 1.8 inch)			390 × 290 × 48mm (15.0 × 11.4 × 1.9 inch)	
Weight(without hard disk)	≤ 1 kg				