

INTEGRASAT SOLUCIONES CENTER SRL**RUC: 20455256357****Equipos, partes y accesorios de tecnología informática y servicios de soporte técnico**

Cotización No. 001 - 21

| NIT | CLIENTE | CONTACTO | FECHA | CIUDAD |
|----------|-----------|----------|-----------|---------------|
| | | | | |
| TELÉFONO | DIRECCIÓN | EMAIL | DESCUENTO | FORMA DE PAGO |
| | | | | |

Atendiendo a su amable solicitud, enviamos la cotización de los productos solicitados por su organización:

| ITEM | CÓDIGO | DESCRIPCIÓN | CANT | VR. UNITARIO | VR. TOTAL |
|--------------------------|--------|---|------|----------------------|---------------------|
| | | KIT 1 : Kit Cableado Basico | 1 | S/. 1,101.69 | S/. 1,101.69 |
| | | CONTENIDO DEL KIT | | | |
| 1 | | CENTRAL SP4000 4 zonas expandible a 32 1 salida programable (para prender luces, etc) | 1 | | |
| 2 | | GABINETE METALICO | 1 | | |
| 3 | | TECLADO K10H/V Modo de señalizacion por iluminacion de teclas visualiza hasta 10 zonas | 1 | | |
| 4 | | PIR (SENSOR DE MOVIMIENTO) Sensor Digital de Alto rendimiento Inmune a animales hasta 16kg. Cobertura 11 m; 90 ° | 2 | | |
| 5 | | SENSOR MAGNETICO Liviano para sobrepegar | 2 | | |
| 6 | | SIRENA DE 30 WATTS 2 Sonidos, Voltaje 6-14 Vdc, 110dB, ABS Blanco | 1 | | |
| 7 | | BATERIA DE 12VDC / 4.2 AH | 1 | | |
| 8 | | FUENTE DE PODER | 1 | | |
| Opciones de Pago: | | | | SUBTOTAL | S/. 1,101.69 |
| | | | | IGV | S/. 198.31 |
| | | | | TOTAL A PAGAR | S/. 1,300.00 |

| Codiciones y validez de la oferta: | |
|---|-------------------|
| Validez: | 30 dias |
| Condiciones de entrega: | Entrega Inmediata |
| Condiciones de Garantía: | garantia de 1 año |

Esperamos haber dado alcance a sus requerimientos

Cordialmente,

RICARDO TALAVERA

RPM: #999033365 RPC:959354677

DIRECCIONES

-Lima: Av Nicolas Arriola 265 Of. 201 (referencia: a 1 cuadra de Cruz del Sur de Javier Prado)

- Arequipa: Calle Rivero 107 of 302. Cercado

También estamos en:

Trujillo Puno Cajamarca - Piura -Tumbes - Ica - Chiclayo - Ayacucho- Tacna - Cusco

CUENTAS BANCARIAS :

INTEGRASAT SOLUCIONES CENTER SRL , RUC : 20455256357

Cuenta Corriente BCP Soles

215-2050250-0-12

Código interbancario: CCI: 00221500205025001225

Cuenta Corriente BCP DOLARES

215-2295979-1-31


Código interbancario: CCI 00221500229597913124

KIT1



ESPECIFICACIONES TECNICAS

KEYPAD OVERVIEW

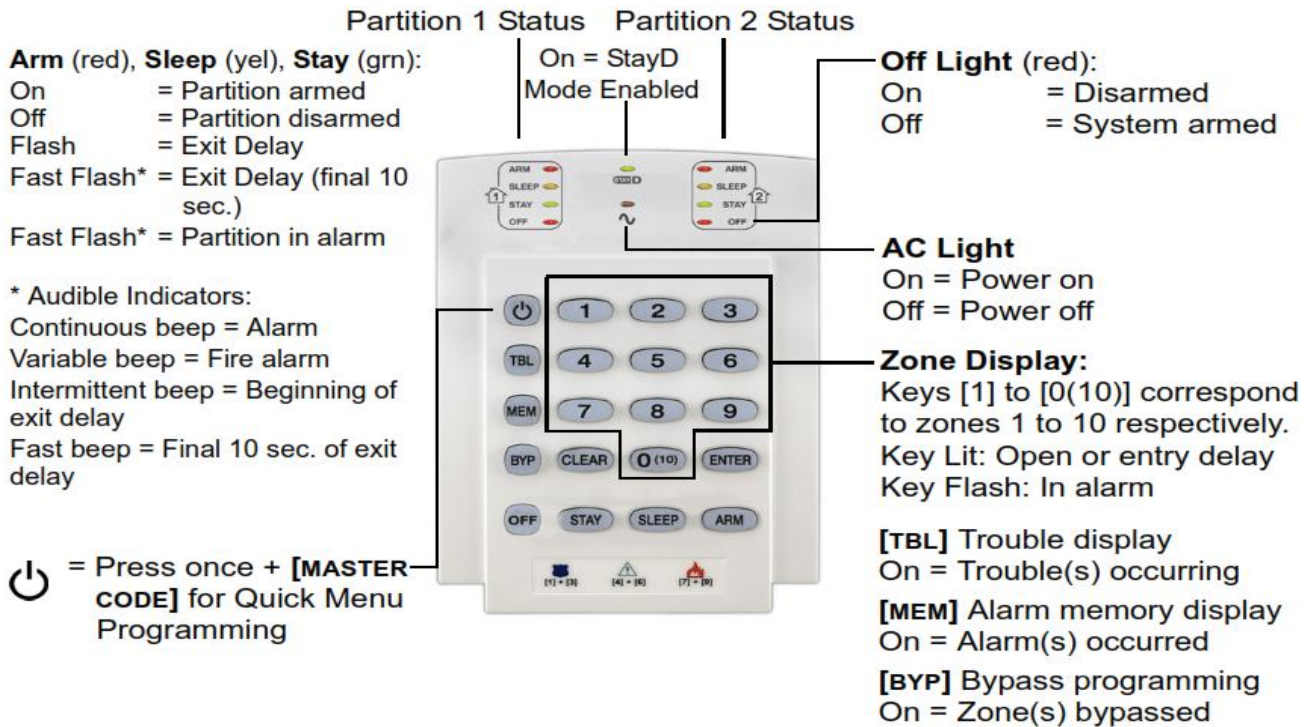

NV5

ENVY
SERIES



NV5 - PIR de Alto Desempeño

- Detector de movimiento controlado vía un software enteramente digital (FADEC)
- 10 x 10 m (32.8 x 32.8 ft) Angulo de vista de 102°
- Inmunidad a mascotas hasta de 16 kg (35 lb)
- Patrón de detección ecualizado de Paradox - 5 niveles de sensibilidad
- Zona de súper rastreo
- Ver Características comunes a Todos los PIR Digitales

ESPECIFICACIONES TECNICAS

P ▲ R ▲ D O X™

NV5

High-Performance Digital Infrared Motion Detector

Description

The NV5 is the entry-level motion detector from Paradox's ENVY line of next generation motion detection. Featuring advanced processing technology, optical technology, and easy installation, the NV5 represents state of the art technology with the most advanced and innovative digital infrared detector of its class.

The NV5 features Paradox's developed optics - a Hybrid Cylindrical / Spherical combination 1.0 inch lens with 3rd generation 3D Lodiff[®] Fresnel segments- the first and most advanced lens in the detection industry. This combination offers the best detection possible for passive infrared energy reception optimized for far beams (cylindrical) and medium/close beams (spherical). This lens also features Paradox's "Equalized" detection pattern, ensuring equal sensitivity throughout the protected area. Furthermore, the NV5 offers Small Pet Resistance or, alternatively, a Super Creep Zone Mirror add-on optics, which provides superior detection directly below the detector (see Beam Pattern).

The NV5 offers Auto Pulse Signal Processing with two levels of RF rejection, dual or single edge processing, and LED feedback for each setting. With precision and equalized detection, superior detector stability, total area coverage, and complete false alarm protection, the NV5 is the most advanced and innovative digital infrared detector in its class.



Features

- Infrared motion detector managed by Full Authority Digital Electronics Control (FADEC)
- Paradox's Hybrid Cylindrical-Spherical 1.0 inch lens with 3rd generation 3D Lodiff[®] Fresnel segments- 10 x 10 m (32.8 x 32.8 ft), 90° viewing angle, and 0.5 m (1.6 ft) to max range (no dead zone beam pattern)
- Paradox's equalized detection pattern - ensures equal sensitivity throughout the protected area
- Paradox Super Creep down-looking beam optic option for straight down detection
- Pet Resistance up to 16 kg (35 lb)
- Dual/Single Edge Processing selection - the only one in its class
- Paradox patented Auto Pulse Signal Processing (APSP) with settings for normal or high interference environments
- Digitally equalized temperature compensation; unit performance specifically tailored to obtain same catch capability at all specified operating temperatures
- Digital Sensitivity trimmer adjustment with five range levels and LED feedback, allows for perfect unit adjustment for all room sizes
- Optional wall/ceiling mount bracket
- Miniature yet easy to install with no PCB removal or adjustment
- CE and EN50131 Grade 2 approved (see PARADOX.com for latest approval updates)
- Interchangeable lenses; 90° standard lens

PARADOX.COM

ESPECIFICACIONES TECNICAS

Advanced Digital Technology (FADEC)


The NV5's digital analysis and algorithms ensure precise and accurate detection performance, managed by Full Authority Digital Electronics Control (FADEC). Depending on the environment application, the NV5 can be easily configured with its unique pre-programmed profile settings (Normal, Moderate, Pet Resistant, and Harsh).

- High-resolution and full-dynamic range digital signal conversion
- High-speed, advanced algorithm, digital signal processing
- Digital EMI / RFI interference rejection
- Five choices of digital range levels (via trimpot)

Advanced Optical Technology

Paradox's Hybrid Cylindrical-Spherical combination offers the best detection possible for passive infrared energy reception for far beams (1. Cylindrical) and medium/close beams (2. Spherical). This lens design allows for ultimate perpendicular beam collection. Superior and uniform energy collection translates to a better image quality of the target which provides unmatched detection accuracy and stability.


- 3rd generation 3D LoDiff[®] Fresnel segments
- Optically and digitally equalized beam pattern (all beams optimized for generating equal signal level at any distance or angle)
- Optional Super Creep Zone or Pet Resistance up to 16 kg (35 lb)

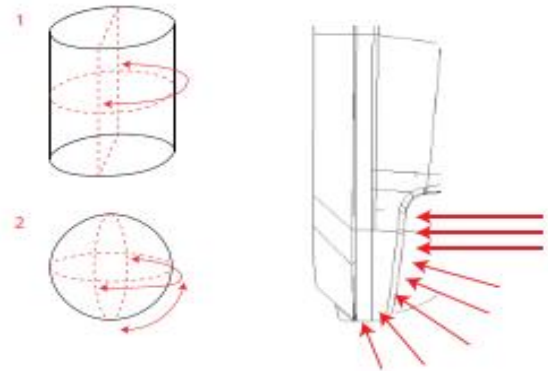

Technical Specifications

| | |
|-------------------------|--|
| Installation height | 2.1 m – 3.1 m (7.0 ft – 10.2 ft) For 10 m and above range, unit must be installed at 2.1 m (7.0 ft) height and above |
| Sensor | Dual rectangular element, low noise, high sensitivity, EMI Immunity |
| Lens | Hybrid Cylindrical Spherical 3 rd gen. Fresnel Lens, equal beam sensitivity (patent pending) |
| Processing | High resolution digital signal processing. Four profiles (Normal, Medium, Pet Res., Harsh), true digital temperature compensation. |
| Super Creep Zone | Add on mirror option for enhanced creep zone at 0.1 m from the wall (no Pet Resistance) |
| Range adjustment | 5 level range adjustments (50% to 150%) |
| Startup time | 10 seconds |
| Detection speed | 0.2 m/s to 3 m/s (0.6 ft/s to 9.8 ft/s) |
| Power input | 10 Vdc to 15 Vdc |
| Current consumption | 10.5 mA @ Standby / 11.3 mA @ Alarm |
| Coverage | 10 m (32.8 ft) x 90° |
| PET Resistance | Up to 16 kg (35 lb) |
| Alarm indicator | Red LED for 3 seconds |
| Alarm output | Solid State, N.C. 150 mA |
| Anti-tamper switch | N.C. 28 Vdc, 0.15 A |
| Operating temperature | -10°C to 50°C (14°F to 122 °F) |
| Humidity | 95% max. |
| Dimensions | 9.1 x 5.5 x 4 cm (3.5 x 2.2 x 1.6 in.) |
| RFI Immunity | 10 V/m 80 MHz to 2 GHz |
| Environmental standards | Complies with EN 50131 Security Grade 2 / Environmental Class I |

Beam Pattern

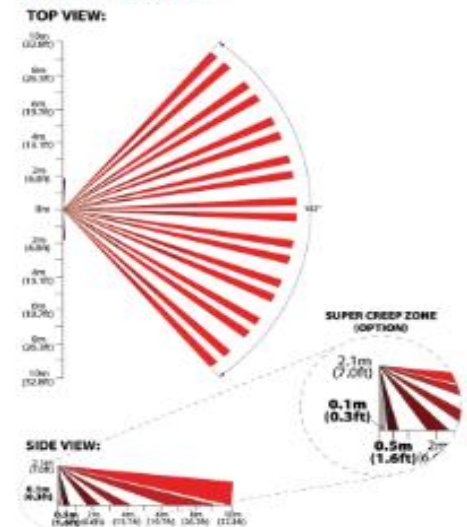

Wall/Ceiling Bracket



THW5-S2K_rev00 - Printed in Canada 12/2013. ENVY Series is a trademark of Paradox Security Systems (Bahamas) Ltd. or its affiliates in Canada, the United States and/or other countries. One or more of the following US Patents 1,382,541 5,977,548 D600010 and other patents pending may apply. Canadian and International patents may also apply. All rights reserved. Specifications may change without prior notice. © 2013 Paradox Ltd.

P ▲ R ▲ D ▲ O ▲ X
PARADOX.COM