



Equipos, partes y accesorios de tecnología informática y servicios de soporte técnico

Cotización No. 001 - 234

NIT	CLIENTE	CONTACTO	FECHA	CIUDAD
			01/10/2016	
TELÉFONO	DIRECCIÓN	EMAIL	DESCUENTO	FORMA DE PAGO

Atendiendo a su amable solicitud, enviamos la cotización de los productos solicitados por su organización:

ITEM	CÓDIGO	DESCRIPCIÓN	CANTIDAD	VR. UNITARIO	VR. TOTAL
1		DVR HK-DS7332HGHI-SH	1	S/. 2,864.41	S/. 2,864.41
2					
3					
4					
5					
6					
Opciones de Pago:				SUBTOTAL	S/. 2,864.41
				IGV	S/. 515.59
				TOTAL A PAGAR	S/. 3,380.00

Codiciones y validez de la oferta:

30 dias

Validez:

Condiciones de entrega:

Entrega Inmediata

Condiciones de Garantía:

garantia de 1 año

Esperamos haber dado alcance a sus requerimientos

Cordialmente,

RICARDO TALAVERA

RPM: #999033365 RPC:959354677

DIRECCIONES

- Direccion: -Lima: Av Nicolas Arriola 265 Of. 201 (referencia: a 1 cuadra de Cruz del Sur de Javier Prado)

- Calle Rivero 107 of 302. Cercado - Arequipa

También estamos en:

Trujillo Puno Cajamarca - Piura -Tumbes - Ica - Chiclayo - Ayacucho- Tacna - Cusco

CUENTAS BANCARIAS :

INTEGRASAT SOLUCIONES CENTER SRL , RUC : 20455256357

Cuenta Corriente BCP Soles

215-2050250-0-12

Código interbancario: CCI: 00221500205025001225

Cuenta Corriente BCP DOLARES

215-2295979-1-31

Código interbancario: CCI 00221500229597913124

ESPECIFICACIONES TECNICAS

HIKVISION

DS-7324/7332HGHI-SH Series DVR



Introduction:

DS-7300HGHI-SH series DVR (Digital Video Recorder) is a new generation recorder developed by Hikvision independently which can connect HD analog/network cameras and Coaxitron cameras and provide powerful surveillance. Combined with multiple advanced technologies, such as audio and video encoding & decoding technology, embedded system technology, storage technology, network technology and intelligent technology. It can both work alone as a recorder and cooperate with other devices to build a comprehensive surveillance system.

The DS-7300HGHI-SH series DVR are widely applied in the areas of finance, public security, military, communication, transportation, education, etc.


Available Models:

DS-7324HGHI-SH, DS-7332HGHI-SH

Main Features:


- Connectable to TVI and analog cameras;
- Connectable to the Coaxitron camera/dome with long transmission distance;
- Connectable to network cameras;
- Simultaneous HDMI and VGA outputs at up to 1920×1080P resolution.
- New GUI and supports starting record with one key;
- Redundant recording, holiday recording schedule configuration;
- Instant playback for assigned camera during multi-channel live view mode;
- Support up to 24/32-ch synchronous playback; and reverse playback for multi-channel;
- Smart playback to go through less effective information;
- Manual video quality diagnostics;
- Support VCA alarm (line crossing detection and intrusion detection);
- Customization of tags, searching and playing back by tags;
- Locking and unlocking record files;
- Support HDD quota and group management; different capacity can be assigned to different cameras under quota mode;
- Provide 4 SATA interfaces and 1 eSATA interface for record and backup;
- 1 self-adaptive 10M/100M/1000M network interface;
- Support access by EZVIZ Cloud P2P;
- Support Hikvision DDNS (Dynamic Domain Name System);
- Network detection function.

Physical Interfaces:

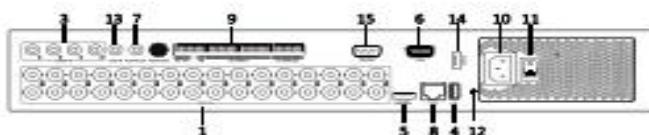

Index	Name
1	VIDEO IN
3	AUDIO IN, RCA Connector
4	USB Port
5	HDMI Interface
6	VGA Interface
7	VGA AUDIO OUT
8	LAN Network Interface
9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
10	100~240V AC Power Input
11	Power Switch
12	GND
13	LINE IN
14	eSATA Interface
15	RS-232 Serial Port

Typical Application:

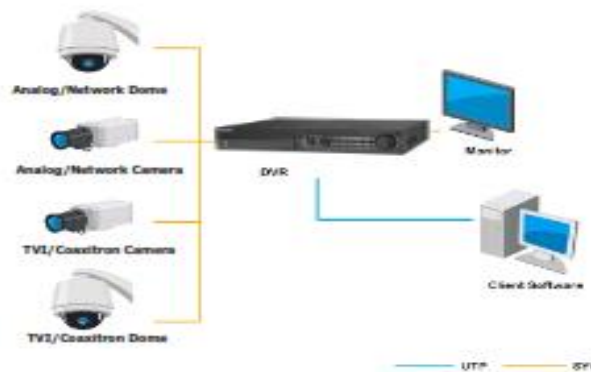

ESPECIFICACIONES TECNICAS

DELTOC

HIKVISION

Specifications:

Model		DS-7324HGHI-SH	DS-7332HGHI-SH
Video/ Audio input	Video compression	H.264	
	Analog and HD-TVI video input	24-ch	32-ch
		BNC interface (1.0Vp-p, 75 Ω)	
	Supported camera types	720P/25, 720P/30, 720P/50, 720P/60, 1080P/25, 1080P/30, CVBS	
	IP video input	8-ch (up to 32-ch)	8-ch (up to 32-ch)
		Up to 2MP resolution	
	Audio compression	G.711u	
	Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)	
Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
Video/ Audio output	HDMI / VGA output	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz	
	Encoding resolution	Main stream: 1080P (non-real-time) / 720P / WDI / VGA / 4CIF / CIF	
		Sub-stream: WDI (non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA	
	Frame rate	Main stream: 1/16 fps ~ Real time frame rate	
		Sub-stream: 1/16 fps ~ Real time frame rate	
	Video bitrate	32 Kbps-6 Mbps	
	Audio output	1-ch, RCA (Linear, 1KΩ)	
	Audio bitrate	64 Kbps	
	Dual-stream	Support	
	Stream type	Video, Video & Audio	
Synchronous playback	24-ch	32-ch	
Playback resolution	1080P / 720P / VGA / WDI / 4CIF / CIF / QVGA / QCIF		
Network management	Remote connection	128	
	Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS	
Hard disk	Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface	
	Capacity	Up to 4 TB capacity for each disk	
External interface	Network interface	1; 10M / 100M / 1000M self-adaptive Ethernet interface	
	Serial interface	RS-232, RS-485, Keyboard	
	USB port	3 × USB2.0	
	Alarm in / out	16 / 4	
General	Power supply	100 ~ 240VAC, 47 ~ 63HZ	
	Consumption (without hard disks)	≤ 55W	≤ 65W
	Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)	
	Working humidity	10% ~ 90%	
	Chassis	19-inch rack-mounted 1.5U chassis	
	Dimensions (W × D × H)	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)	
Weight (without hard disks)	≤ 5Kg (11.0lb)		